



REVERSOMATIC
MANUFACTURING LIMITED

BF-5, BF-6, BF-7, BF-8, BF-9

**BOOSTER FANS ARE USED FOR
TRANSFERRING HOT OR COLD
AIR IN PIPE SYSTEMS.
BOOSTER FANS ARE EASY TO
INSTALL AND FIT IN ROUND
DUCT LINES.**


BOOSTER FAN



OPERATION AND INSTALLATION

BOOSTER FAN has a female collar on the incoming side and a male crimp on the outgoing side so it fits right into a standard 5", 6", 7", 8" or 9" round duct.

BOOSTER FAN can be operated and connected by using an on/off switch and power source of 120V, 60Hz.

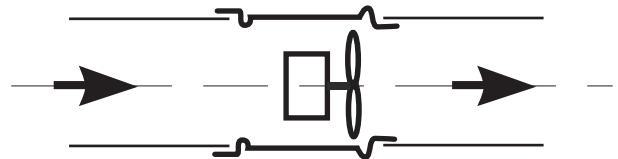


Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com

BF-5, BF-6, BF-7, BF-8, BF-9

BOOSTER FAN

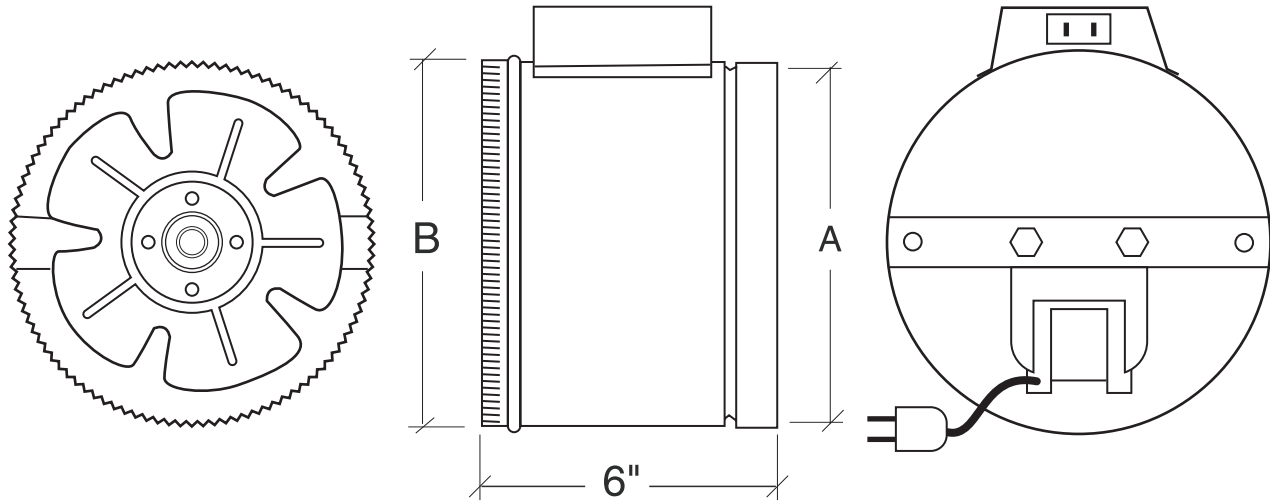

FAN DATA

MODEL	MOTOR	BLADE	C.F.M.	S.P.
BF-5	1.00A CCW	Alum: 4.5" dia.	60	0
BF-6	0.76A CCW	Alum: 5" dia.	90	0
BF-7	0.90A CCW	Alum: 6" dia.	120	0
BF-8	1.20A CCW	Alum: 7" dia.	160	0
BF-9	0.86A CCW	Alum: 8" dia.	220	0

DIMENSIONS

MODEL	A	B
BF-5	5"	4.875"
BF-6	6"	5.875"
BF-7	7"	6.875"
BF-8	8"	7.875"
BF-9	9"	8.875"

Contractor:	BOOSTER FAN		
Architect:	Date	Supersedes	Drawing No.
Engineer:			

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com