




BATHROOM EXHAUST FAN

The RS-85 has been specially designed for bathrooms in residential units that require exceptionally low noise levels. It has been manufactured with a squirrel cage impeller for high performance. The slim housing design allows for easy installation in those tight ceiling and wall spaces. The fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. It also meets Washington State Ventilation and Indoor Air Quality Code.

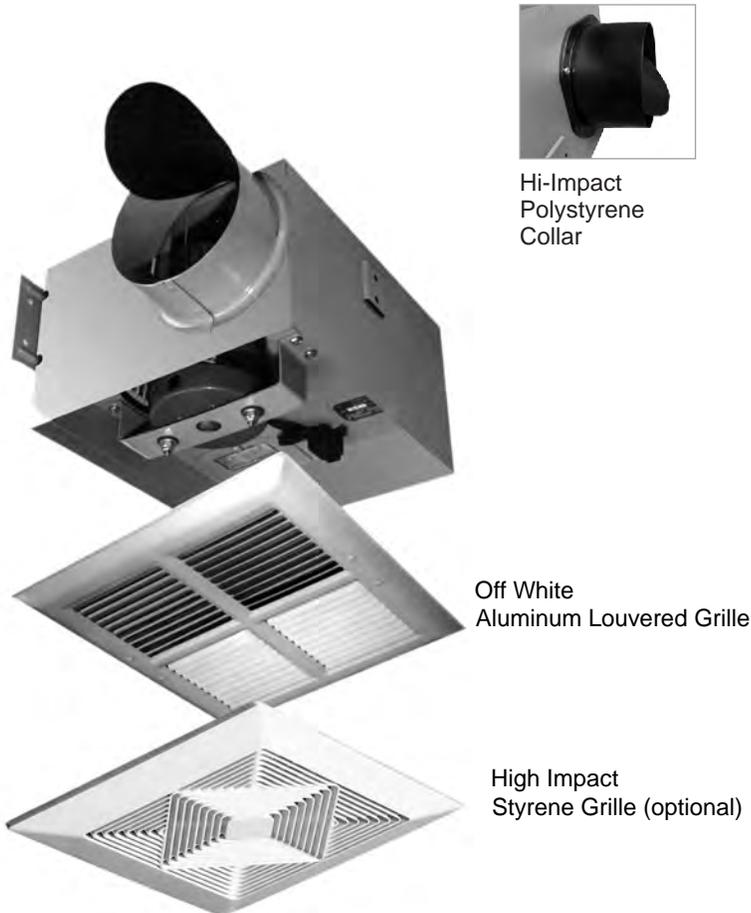


Hi-Impact
Polystyrene
Collar

Off White
Aluminum Louvered Grille

High Impact
Styrene Grille (optional)

RS-85 FAN DATA

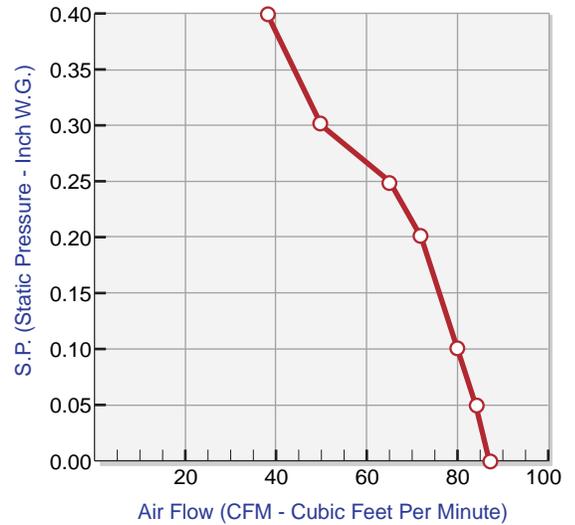

ACCESSORIES


Standard:

- White aluminum louvered grille
- Metal collar with neoprene damper
- Mounting bracket

Optional:

- Plastic snap-in grille
- Variable speed control
- Aluminum backdraft damper
- Hi-Impact Polystyrene collar



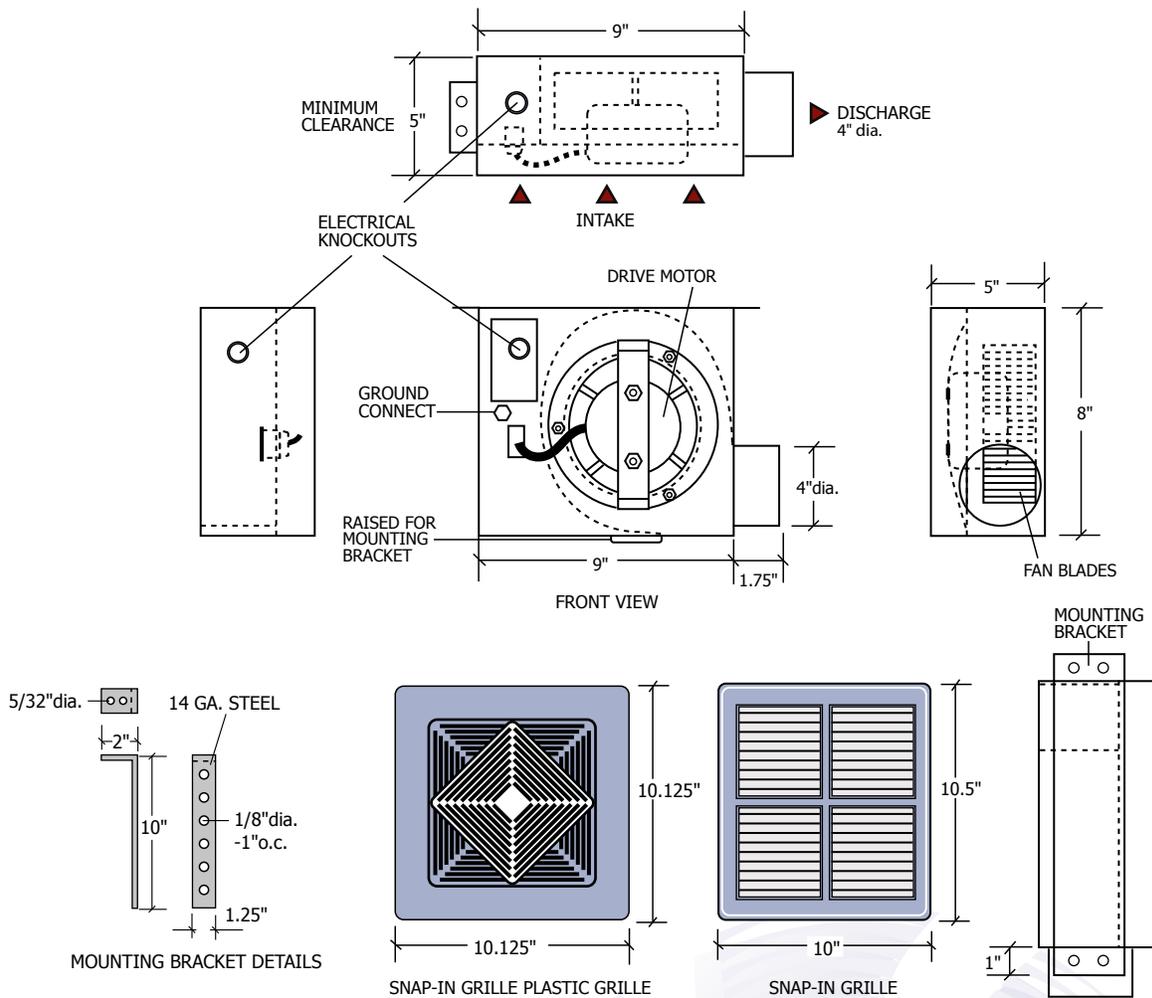

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
RS-85	2.5	80

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE						
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.20	0.25	0.30	0.40
RS-85	1080	0.35	CFM	87	84	80	72	65	50	38

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:	RS-85 (EB-80 US model)		
Architect:	Job:	Data	Supersedes
Engineer:	Date Submitted:		Drawing NO.

Reversomatic Manufacturing Ltd.