




## RS-90-2 (Two Speed)

Constant Ventilation Fan  
MAY 2010

### BATHROOM EXHAUST FANS

The RS-90-2 fans has been specially designed for bathrooms in residential units that require exceptionally low noise levels and constant ventilation. These fans are manufactured with a squirrel cage impeller for high performance. The slim housing design allows for easy installation in those tight ceiling and wall spaces.

### RS-90-2 FAN DATA

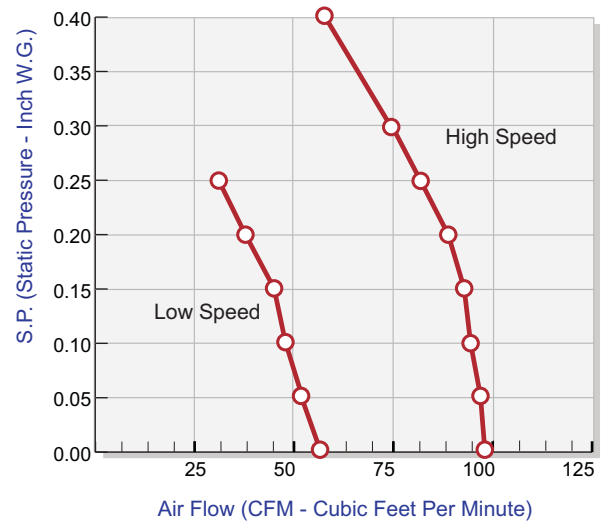

Plastic Backdraft Damper

Off White Aluminum Louvered Grille (optional)

Styrene Grille

### ACCESSORIES

#### Standard

- Plastic snap-in grille
- Plastic backdraft damper or metal collar with neoprene damper
- Mounting bracket

#### Optional:


- Aluminum backdraft damper
- Off white aluminum grille
- 3 position toggle switch (on/off/on)




**Reversomatic Manufacturing Ltd.**

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
www.reversomatic.com • info@www.reversomatic.com

# RS-90-2 (Two Speed)

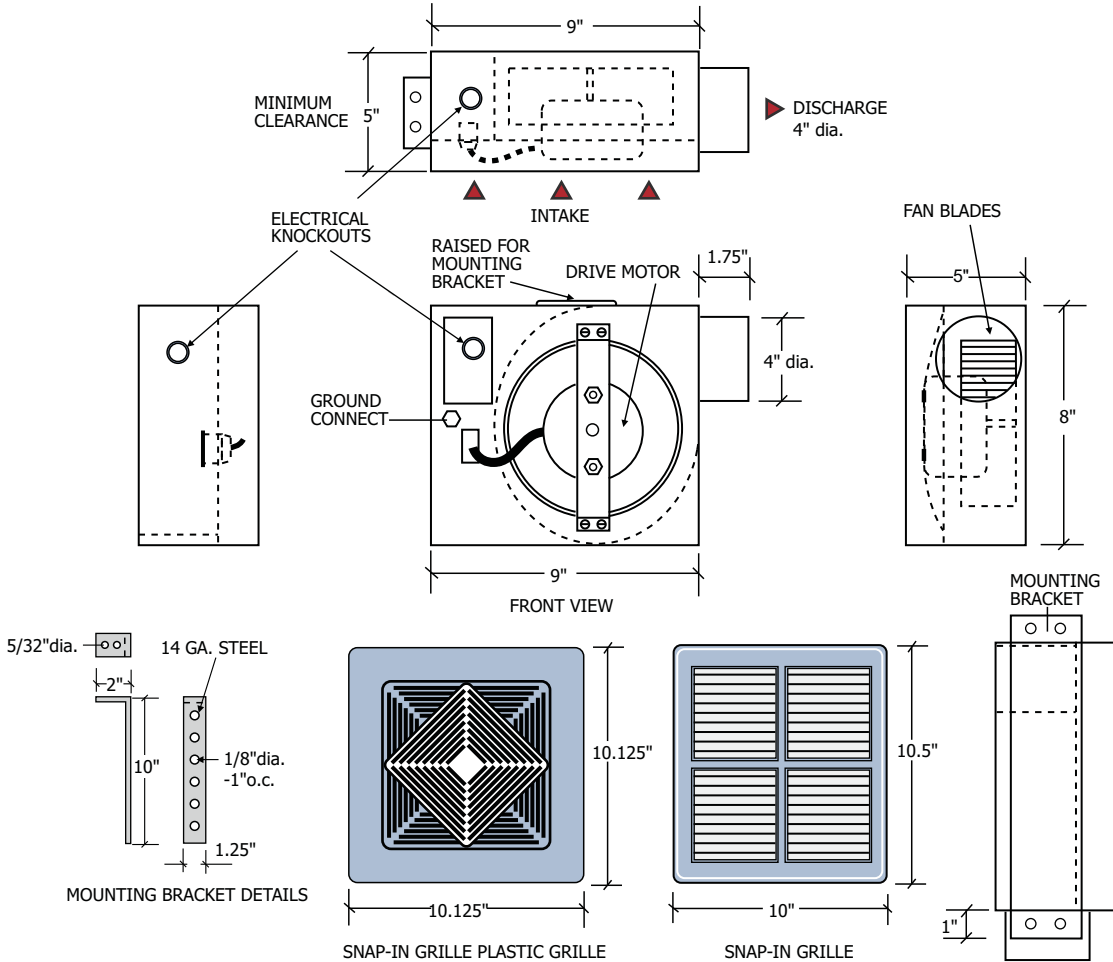

### Wiring Diagram:

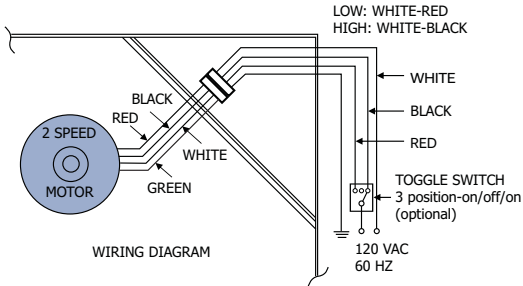

**HVI RATING:**  
**90 CFM @ 0.10" S.P., 2.5 Sones**  
**(High Speed Only)**

### FAN DATA

MODEL	MOTOR 120 VAC 60 Hz		CUBIC FEET PER MINUTE									SONE @ 0.10
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40	
RS-90-2	1500	0.50	CFM	96	95	93	91	88	81	74	58	2.5
	1100	0.35	CFM	56	52	48	43	36	30	-	-	0.7

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:	<b>RS-90-2 (Two Speed)</b>			
Architect:	Job:	Date	Supersedes	Drawing No.
Engineer:	Date Submitted:			