



**REVERSOMATIC**  
MANUFACTURING LIMITED

**UBA / UBS Series**

## UP BLAST

### BELT DRIVEN ROOF EXHAUST FAN

24" through 60"  
Capacities from 1,000 to 47,000 CFM

These low pressure, belt driven fans are ideally suited for ventilation of warehouses, public buildings, greenhouses etc.

### FEATURES

- The frame features a Venturi orifice
- Welded construction
- Housing made of heavy gauge satin coat steel
- Enamel finish
- Belt drive engineered to 50% overload
- For both exhaust and intake
- Non overloading characteristics
- The propeller blades are made of heavy gauge steel and are factory statically balanced
- Self acting, butterfly aluminum damper

### OPTIONAL ACCESSORIES

- Two speed motor
- Special coatings
- Variable pitch pulleys
- Static free belts



**Reversomatic Manufacturing Ltd.**


790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376

Toll Free: 1.800.810.3473 (Canada) • 1.866.890.6457 (U.S.A.)

[www.reversomatic.com](http://www.reversomatic.com) • [info@reversomatic.com](mailto:info@reversomatic.com)

# UBA / UBS Series

## Up Blast Belt Driven Roof Exhaust Fan

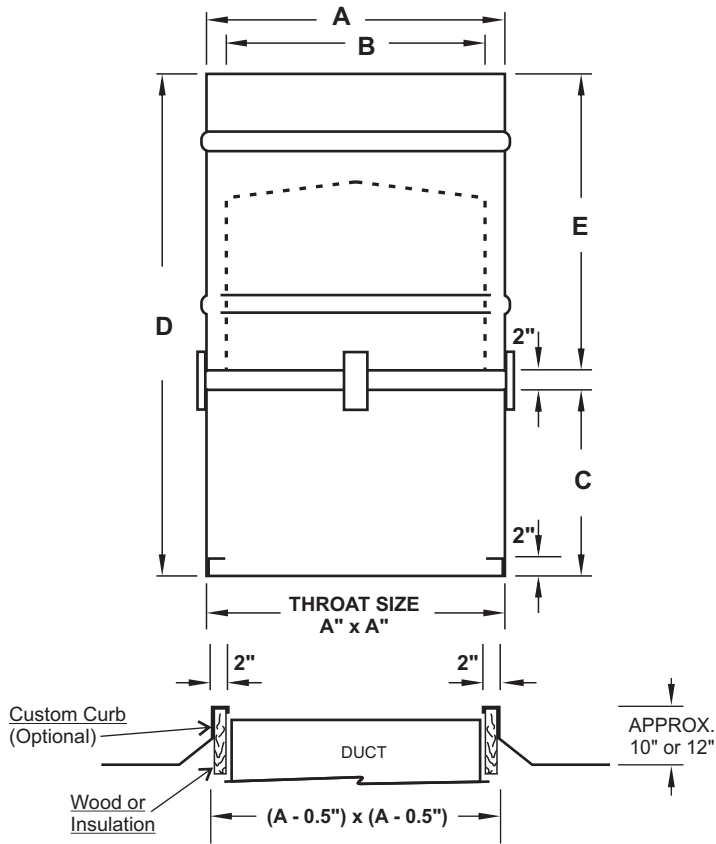

### DIMENSION

Model	A	B	C	D	E
UB-24	30"	25"	22"	44"	20"
UB-30	36"	31"	22"	50"	26"
UB-36	42"	37"	22"	50"	26"
UB-42	49"	43"	25"	53"	26"
UB-48	55"	49"	25"	56"	29"
UB-54	60"	55"	25"	59"	32"
UB-60	68"	61"	25"	61"	34"


Bearings	Grease	Symbols	Operating Temperature Range
Standard	Alvania No. 3 (Lithium Base)	D1	-15° to +100°C (+5 to 212°F)
Heat-resistant	Shell Darina No.2 (Non-soap)	HT1D1	Normal Temp. to +140°C (284°F)
Heat-resistant	Toray Silicone SH44M (Silicone Oil)	HT2D1	Normal Temp. to +200°C (392°F)
Cold-resistant	Toray Silicone SH33L (Silicone Oil)	CT1D1	-60°C (-75°F) to Normal Temp.

		FAN DATA				FAN MOTOR					
FAN NO.	QTY	MODEL NO.	CFM	SP	RPM	HP	RPM	VOLTS	PH	HZ	ENCLOSURE

Contractor:						Roof Exhaust Fan					
Architect:			Job:			Date	Supersedes	Drawing No.			
Engineer:			Date Submitted:								

### Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
 Toll Free: 1.800.810.3473 (Canada) • 1.866.890.6457 (U.S.A.)  
[www.reversomatic.com](http://www.reversomatic.com) • [info@reversomatic.com](mailto:info@reversomatic.com)



**"S" BLADE**  
**Standard blade**  
 Std. Blade Thickness - 18 GA  
 Std. Hub Thickness - 10 GA

**UBS SERIES**  
**TYPE "S"**  
**PROPELLER**

**PERFORMANCE DATA**

**CUBIC FEET PER MINUTE AND HORSEPOWER REQUIREMENTS**

CATALOG NUMBER	FAN RPM	FREE AIR		1/8		1/4		3/8		1/2		5/8		3/4		7/8		1		1-1/4		1-1/2	
		CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
UBS 24	1530	9,077	1.50	8,770	1.55	8,464	1.61	8,072	1.67	7,581	1.75	7,033	1.82	6,328	1.88	5,598	1.94	4,660	1.99	3,704	2.18	2,859	2.41
	1335	7,920	0.99	7,569	1.04	7,175	1.09	6,643	1.16	6,015	1.22	5,160	1.27	4,147	1.32	3,489	1.38	3,045	1.49	2,199	1.68	1,549	1.86
	1215	7,208	0.75	6,822	0.79	6,355	0.84	5,691	0.90	4,827	0.95	3,745	0.99	3,082	1.06	2,572	1.15	2,108	1.24	1,398	1.40	768	1.58
	1140	6,763	0.62	6,352	0.66	5,811	0.71	5,057	0.77	4,021	0.81	3,035	0.85	2,506	0.94	1,995	1.02	1,601	1.10	901	1.26	357	1.41
	927	5,499	0.33	4,958	0.37	4,091	0.41	2,742	0.44	2,015	0.51	1,439	0.57	978	0.63	580	0.70	271	0.76				
	840	4,983	0.25	4,361	0.28	3,221	0.32	2,043	0.36	1,362	0.42	850	0.48	432	0.54	104	0.59						
UBS 30	1040	11,939	1.51	11,273	1.66	10,596	1.79	9,675	1.92	8,770	1.96	7,364	2.13	6,506	2.17	5,346	2.29	4,693	2.45	3,500	2.79	2,417	3.14
	905	10,389	0.99	9,630	1.12	8,707	1.24	7,664	1.29	6,212	1.41	4,878	1.46	4,127	1.61	3,428	1.76	2,760	1.90	1,578	2.21	625	2.52
	860	9,873	0.85	9,076	0.97	8,058	1.08	6,940	1.12	5,530	1.23	4,252	1.32	3,483	1.46	2,780	1.60	2,122	1.75	971	2.04	69	2.33
	720	8,265	0.50	7,281	0.60	5,955	0.65	4,178	0.73	3,093	0.83	2,249	0.95	1,495	1.07	818	1.20	279	1.32				
	625	7,175	0.33	5,943	0.41	4,168	0.47	2,700	0.54	1,728	0.65	894	0.75	260	0.86								
	570	6,543	0.25	5,140	0.32	3,025	0.37	1,922	0.46	963	0.56	230	0.65										
UBS 36	890	17,156	2.12	16,245	2.26	15,239	2.36	14,177	2.47	12,742	2.58	11,025	2.66	8,697	2.76	7,107	2.83	6,082	2.98	4,174	3.36	2,847	3.76
	810	15,614	1.60	14,613	1.72	13,469	1.80	12,129	1.92	10,328	2.00	7,779	2.09	6,317	2.14	5,154	2.30	4,077	2.48	2,547	2.85	1,183	3.23
	705	13,590	1.06	12,413	1.16	11,073	1.24	9,061	1.32	6,093	1.39	4,847	1.48	3,628	1.63	2,699	1.79	1,865	1.95	332	2.28		
	640	12,337	1.79	11,009	0.87	9,310	0.96	6,842	1.01	4,598	1.09	3,213	1.23	2,237	1.37	1,349	1.52	505	1.67				
	560	10,795	0.53	9,238	0.60	6,880	0.66	4,140	0.72	2,583	0.48	1,529	0.97	563	1.10								
	490	9,446	0.53	7,612	0.24	4,064	0.47	2,336	0.56	1,147	0.67	44	0.97										
UBS 42	854	24,878	3.97	23,701	4.23	22,525	4.50	21,454	4.63	20,237	4.63	18,260	4.63	16,208	4.70	13,292	4.99	11,308	4.99				
	770	22,670	3.00	21,379	3.24	20,088	3.48	19,008	3.50	16,974	3.50	14,723	3.57	11,465	3.77	9,660	3.77	8,175	4.12	5,938	4.82		
	670	19,726	1.98	18,242	2.19	16,871	2.31	14,842	2.31	12,170	2.43	9,028	2.49	7,208	2.69	5,668	3.02	4,791	3.29	3,185	3.73	1,734	4.15
	530	15,604	0.98	13,734	1.14	11,347	1.14	7,479	1.23	5,188	1.40	3,797	1.63	2,765	1.81	1,832	1.97	928	2.14				
	485	14,279	0.75	12,294	0.88	9,206	0.90	5,547	0.99	3,701	1.21	2,556	1.38	1,540	1.53	552	1.68						
	425	12,512	0.50	10,224	0.59	5,765	0.63	3,342	0.80	2,048	0.95	907	1.08										
UBS 48	700	31,865	3.96	30,137	4.32	28,349	4.57	26,393	4.75	23,759	4.96	21,172	5.03	18,275	5.10	13,310	5.31	11,274	5.68	8,253	6.18	5,823	7.01
	635	28,906	2.96	27,001	3.28	25,001	3.47	22,399	3.65	19,532	3.75	16,160	3.82	11,536	4.05	9,512	4.34	7,893	4.56	5,160	5.26	3,149	5.95
	555	25,264	1.98	23,071	2.24	20,554	2.39	17,253	2.50	12,744	2.57	9,013	2.82	7,125	3.02	5,429	3.31	4,107	3.60	1,850	4.21		
	440	20,029	0.98	17,208	1.16	13,207	1.25	7,607	1.37	5,069	1.54	3,296	1.79	1,836	2.04	570	2.24						
	400	18,208	0.74	14,988	0.98	10,010	0.96	5,458	1.11	3,201	1.32	1,604	1.54	222	1.72								
	350	15,932	0.50	11,879	0.62	5,637	0.71	2,912	0.88	1,130	1.06												
UBS 54	520	34,260	3.95	31,738	4.16	28,796	4.33	24,626	4.53	18,622	4.58	15,263	4.63	13,084	4.99	10,906	5.35	9,106	5.73	5,785	6.49	3,098	7.35
	475	31,296	3.01	28,476	3.17	24,759	3.34	19,435	3.49	14,433	3.49	11,967	3.80	9,582	4.13	7,728	4.48	5,910	4.82	2,841	5.60	1,123	6.57
	415	27,342	2.01	24,035	2.12	19,237	2.32	12,847	2.33	9,955	2.59	7,466	2.88	5,385	3.19	3,305	3.49	2,122	3.89	155	4.73		
	330	21,742	1.01	16,945	1.12	9,733	1.18	6,360	1.41	3,743	1.65	1,760	1.94	523	2.27								
	300	19,766	0.76	14,098	0.87	7,537	0.96	4,283	1.17	1,780	1.41	419	1.72										
	260	17,130	0.49	9,311	0.57	4,553	0.72	1,549	0.92														
UBS 60	495	47,591	6.02	44,725	6.32	41,302	6.64	36,821	6.98	30,474	7.06	24,401	7.17	20,665	7.32	17,637	7.74	14,815	8.24				
	465	44,706	4.99	41,656	5.28	37,908	5.57	32,855	5.79	24,794	6.03	20,579	6.02	17,101	6.33	14,096	6.80	11,477	7.35				
	415	39,899	3.55	36,350	3.80	31,572	4.08	23,074	4.32	18,289	4.28	14,518	4.59	11,288	5.03	8,479	5.55	6,484	6.08	3,401	7.16		
	390	37,496	2.94	33,632	3.19	28,202	3.42	19,786	3.53	15,133	3.65	11,551	4.04	8,512	4.52	6,230	5.02	4,482	5.52	1,387	6.54		
	340	32,688	1.95	28,077	2.16	18,989	2.38	13,357	2.40	9,342	2.76	6,203	3.18	4,050	3.26	2,275	4.07	500	4.51				
	270	25,959	0.98	19,174	1.13	10,048	1.23	5,390	1.54	2,733	1.89	498	2.24										

CONTRACTOR		<b>UBS SERIES FAN DETAIL</b>		
ARCHITECT	JOB	DATE	SUPERSEDES	DRAWING NO.
ENGINEER	DATE SUBMITTED	REVERSOMATIC Heating & Mfg. Ltd Toronto, Ontario		



**REVERSOMATIC**  
MANUFACTURING LIMITED

## **INSTALLATION & MAINTENANCE GUIDE**

General Instructions

**REGULAR MAINTENANCE / LUBRICATION OF THIS UNIT IS REQUIRED TO MAINTAIN THE MANUFACTURER'S WARRANTY.**

**FOR MOTORS LARGER THAN 7 ½ HP, AN ELECTRONIC "SOFT START" CONTROL IS RECOMMENDED FOR LONGER BELT LIFE.**

### **C A U T I O N**

IT IS STRONGLY RECOMMENDED THAT BEFORE STARTING UP THE FAN THE FOLLOWING INSPECTIONS ARE PERFORMED.

- 1. FAN BELT (IF USED) TIGHTNESS AND ALIGNMENT.**
- 2. FAN BLADE CENTERING AND ROTATION.**
- 3. FAN BLADE MOUNTING BOLT TIGHTNESS.**
- 4. MOTOR MOUNTING PLATE BOLT TIGHTNESS.**
- 5. BEARING LUBRICATION.**

### **WARNINGS AND SAFETY INSTRUCTIONS**

1. Do not operate the fan excess of maximum limit.
2. Do not permit any object to enter the fan inlets or outlets; provide a screen covering.
3. Do not operate the fan without adequate guards over rotating parts; provide drive belt, coupling and shaft guards.
4. Provide a disconnect switch with a padlock to prevent fan switch use during maintenance.
5. Locate a disconnect switch at the fan for use of personnel working on the fan.
6. Provide vibration limiting switches to detect sudden changes in the operation of the fan, especially when operating a fan under high temperatures or in an extremely corrosive atmosphere such as fly ash.
7. Lubricate and service bearings regularly. see lubrication schedule.

**Reversomatic Manufacturing Ltd.**

790 Rowntree Dairy Road, Woodbridge, ON, Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
www.reversomatic.com • info@reversomatic.com

# INSTALLATION & MAINTENANCE GUIDE

## Performance Problems:

**CFM too low** - These are some common sources of this problem:

**Fan** - forward curved impeller installed backwards, fan running backwards, cutoff missing or improperly installed, impeller not centered with inlet collars, fan speed too slow.

**System** - more resistant to flow than expected, dampers or registers closed, leaks in supply ducts, insulating duct liner loose, clogged filters or coils.

**Fan Inlets** - leaks around fan inlets, elbows near the inlet, cabinet walls too close. Inlet obstructions cause more restrictive systems but do not cause increased negative pressure readings near the fan inlets. Fan speed may be increased to counteract the effect of restricted fan inlet, but check the maximum RPM for the wheel construction before increasing the speed.

**Fan Outlet** - most centrifugal fans are used in ducted systems and have been tested with a length of straight duct at the fan outlet, If there is no straight duct at the fan outlet, decreased fan performance will result. If it is not practical to install a straight section of duct at the fan outlet, the fan speed may be increased to overcome this pressure loss. Other sources affecting fan outlet may be sharp elbow nearby, improperly designed turning vanes or other obstructions near the outlet.

**Noise** - may be caused by:

- Impeller hitting the inlet of the fan or cutoff plate, loose impeller.
- Drives can cause noise if sheaves are not tight on the shaft, belts are too loose or too tight, wrong belt cross section, or mis-matched belts, also worn belts, oily belts or mis-aligned sheaves.
- If couplings are used they may be source of noise by being unbalanced, misaligned, loose or dry of lubricant.
- Bad bearings are a common source of noise when defective, dry of lubricant, loose on the bearing support, loose on the shaft, seals mis-aligned, dirty lubricant, fretting corrosion between inner race and shaft, etc. See separate section on bearing care.
- There can be an electrical source of noise such as AC hum in motor or relay, starting relay chatter, noisy motor bearings, single phasing a 3 phase motor, etc.
- A bent or undersized shaft may be a noise source. **IF MORE THAN TWO BEARINGS ARE ON THE SAME SHAFT, THEY MUST BE CAREFULLY ALIGNED.**
- There may be other noise sources such as obstruction in high velocity air stream causing rattle or pure tone whistle, fan operating at undesirable design point, causing pulsation, cracks or holes in duct work, or whistles in fan housing.

## LUBRICATION

### RELUBRICATION SCHEDULE (MONTHS)\* Ball Bearing Pillow Blocks

SHAFT DIAMETER	Operating Speed (RPM)									
	500	1000	1500	2000	2500	3000	3500	4000	4500	5000
5/8" thru 1"	6	6	6	6	4	4	4	4	2	2
1 1/8" thru 1 1/2"	6	6	6	4	4	4	2	2	2	1
1 5/8" thru 1 15/16"	6	6	6	4	4	2	2	1	1	-
2" thru 2 1/2"	6	6	4	4	2	1	1	-	-	-
2 11/16" thru 3 3/16"	6	4	2	2	1	1	1/2	-	-	-

\*Suggested initial greasing interval - relubricate while running, if safety permits, until some purging occurs at seals. Adjust lubrication frequency depending on condition of purged grease. Hours of operation, temperature, and surrounding conditions will affect the relubrication frequency required.

- Lubricate with a high quality NLGI No. 2 or No.3 multi purpose ball bearing grease having rust inhibitors and anti-oxidant additives.

**Some grease having these properties are:**

- Shell - *Alvania EP No.2*
- Mobil - *Mobilux Ep2*
- Texaco - *Molytex No.2*
- Gulf - *Gulfcrown No. 2*
- American - *Amolith No. 2*

- Lubricate bearings prior to extended shutdown or storage and rotate shaft monthly to avoid corrosion.

### Spherical Roller Bearings - Solid Pillow Blocks

SHAFT DIAMETER	Operating Speed (RPM)									
	500	1000	1500	2000	2200	2700	3000	3500	4000	4500
3/4" thru 1"	6	6	6	4	4	4	2	2	1	1
1 1/8" thru 1 1/4"	6	6	4	4	2	2	1	1	1	1
1 7/16" thru 1 1/2"	6	4	4	2	2	1	1	1	1	1/2
1 5/8" thru 1 3/4"	6	4	2	2	1	1	1	1	1/2	-
1" 15/16" thru 2"	6	4	2	1	1	1	1	1/2	-	-
2 3/16" thru 2 1/4"	6	4	2	1	1	1	1/2	-	-	-
2 7/16" thru 2 1/2"	4	2	1	1	1	1/2	-	-	-	-
2 11/16" thru 3"	4	2	1	1	1/2	-	-	-	-	-
3 3/16" thru 3 1/2"	4	2	1	1/2	-	-	-	-	-	-

- Lubricate with a multi-purpose roller bearing NLGI grade 2 grease having rust inhibitors, anti-oxidant additives, and a minimum oil viscosity of 500 SSU at 100°F. Some additives.

**Some grease having these properties are:**

- American - *Rykon No.2*
- Mobil - *Mobilgrease 28*
- Texaco - *Molytex Ep2 grease*

- Lubricate bearings prior to extended shutdown or storage and rotate shaft monthly to avoid corrosion.

## RECOMMENDED 'SKF' GREASES FOR 'SKF' BEARINGS

*Fixed Pillow Block* - LGMT2 Fans running below 80°C (176°F)

*Split Pillow Block* - LGMT3 Fans running below 80°C (176°F)

**Fans Running Above 80°C thru 150°C - LGHT3**

## TROUBLESHOOTING LIST

- IMPELLER** . . . . . a. Loose on shaft  
b. Unbalance
- DRIVE** . . . . . a. Sheave not tight on shaft (motor or fan)  
b. Belts hitting belt tube or belt guard  
c. Belts too loose. Adjust for belt stretching after 48 hours of operation.  
d. Belts too tight  
e. Belts wrong cross-section  
f. Belts not "Matched" in length on multi-belt drive  
g. Variable pitch sheaves not adjusted so each groove has same pitch diameter (multi-belt drive)  
h. Misaligned sheaves  
i. Belts worn  
j. Motor, Motor base or fan not securely anchored  
k. Belts oily or dirty  
l. Improper drive selection  
m. loose key  
n. Excessive start-stop cycles
- COUPLING** . . . . . a. Coupling unbalanced, misaligned, loose or may need lubricant  
b. Loose key
- BEARING** . . . . . a. Defective bearing  
b. Needs lubrication  
c. Loose on bearing support  
d. Loose on shaft  
e. Seals misaligned  
f. Foreign material inside bearing  
g. Worn bearing  
h. Fretting corrosion between inner race and shaft  
i. Bearing not sitting on flat surface  
j. Excessive belt tension
- SHAFT** . . . . . a. Bent  
b. Undersized
- MOTOR** . . . . . a. Noisy motor bearings  
b. Single phasing a three phase motor  
c. Low voltage
- LOOSE FASTENERS** . . . . . a. Impeller set screws  
b. Bearing set screws  
c. Drive component set screws  
d. Fan mounting bolts  
e. Bearing bolts  
f. Motor bolts