


SPECTROLITE FAN "L" SERIES

FAN WITH LIGHT COMBINATION

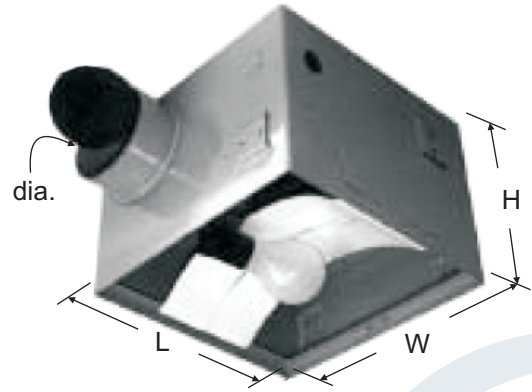

FEATURES:

- Attractive Styling
- Heavy Gauge Non Corrosive satin Coat Construction
- Simplified Mounting System
- Motor Mounted on Neoprene Mounts for Quiet Vibration Free Operation

FAN DIMENSIONS

MODEL	L"	W"	H"	COLLAR dia.
EBL50-70	9	8	7.5	3
EBL80-100	9	8	7.5	4
QBL80-120	10	10	7.5	4
QBL130*	10	10	10.5	5
QBL200	10	10	7.5	5
QCFL95-125*	10	10	10.5	5
QCFL170*	10	10	11.0	5


*Models carry blower type housing.

NOTE:

- Bulb not included
- Maximum 60W Incandescent
- For more light and energy saving use CFL Bulb.



- Bulb contains Mercury, dispose it according to local, state & federal laws and regulations.



Blower Type Housing

STANDARD FEATURES:

- White Aluminum Grille
- Continues Duty Life Time Lubricated Motor with Thermal Protection
- Universal Mounting Brackets
- Plug Type Disconnect

OPTIONAL FEATURES:

- Speed Controller
- Neoprene Vibration Isolator

SPECTROLITE FAN "L" SERIES PERFORMANCE CHART

MODEL	RPM	AMPS	S.P.	0.00	0.10	0.15	0.20	0.25	0.30	0.40	0.50	0.60	SONES
EBL50	1800	0.76		55	50	45	40	34	28	-	-	-	2.5
EBL60	2000	0.90		65	61	59	58	57	55	48	43	36	2.5
EBL70	2200	1.20		66	63	62	62	61	60	53	51	45	3.5
EBL80	1080	0.35		87	80	76	72	62	52	-	-	-	2.5
EBL100	1400	0.60		113	102	94	86	76	65	56	-	-	3.0
QCFL95*	1050	0.35		98	87	81	71	50	27	-	-	-	1.3
QCFL110*	1050	0.60		115	105	102	93	85	74	37	-	-	1.0
QCFL125*	1050	0.60	CFM	126	118	117	115	112	108	90	66	44	1.0
QCFL170*	1400	0.70		158	144	140	129	120	111	94	-	-	1.5
QBL80	1000	0.35		77	69	64	60	53	45	-	-	-	2.0
QBL100	1550	0.60		115	105	98	92	82	73	47	-	-	2.5
QBL120	1650	0.9		126	118	110	105	96	88	60	-	-	3.3
QBL130*	1400	0.70		128	119	114	108	100	91	68	-	-	2.0
QBL200	1550	1.40		201	196	193	190	186	182	172	160	145	4.5

Not designed for in-line

*Models carry blower type housing