



Shop Drawing RHRV-120PES (Polypropylene Core)

Features

- Over all size 23" (W) x 21.50" (D) x 10.25" (H)
- Power ratings: 115V / 1 / 60 Hz, 1.1 Amp., Standby current is 7W only
- Washable Polypropylene core and Filters
- High efficiency energy saving permanently lubricated variable speed PSC motors for air balancing
- Suitable for horizontal & vertical installation
- Tilted core design for maximum efficiency
- Automatic fan cycled defrost
- Exhaust up to three washrooms
- Two Speed exhaust (High / Low) - up to 165 CFM
- Continuous fresh air supply at Normal speed up to 140 CFM
- Furnace / Fan-coil / Heat Pump Interlock
- Dual Protection: If exhaust fan fails, the outside fresh-air supply will be closed by shutting off supply motor and the relay contact for motorized damper and interlock will be opened. Fan Coil/Furnace low speed will be stopped and at normal operation no air will enter into the system
- In case of power failure, optional motorized spring return damper stops the fresh air intake and prevent core from freezing
- Weight approximately 60 lbs., 2 years warranty on parts

Accessories (Included):


- Mounting brackets and Drain plugs

Optional:


- Motorized Damper (120V AC), option 1 & 2
- Dehumidistat
- Pipe and "T" connector
- Time Delay Switch (120V AC)
- 2 sets (Webbing/Brackets/Ladder lock)
- Intermittent Switch (5VDC)
- Push button timer switch (20/40/60 Min., 5VDC)

Installation Options for house




Furnace Return Air-duct Connection

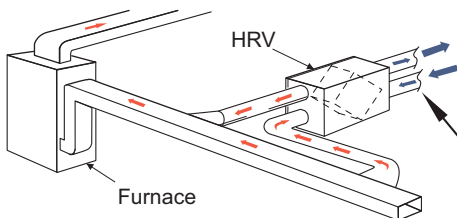

Semi Ducted System

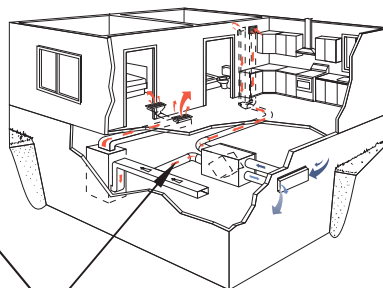

Fully Ducted System

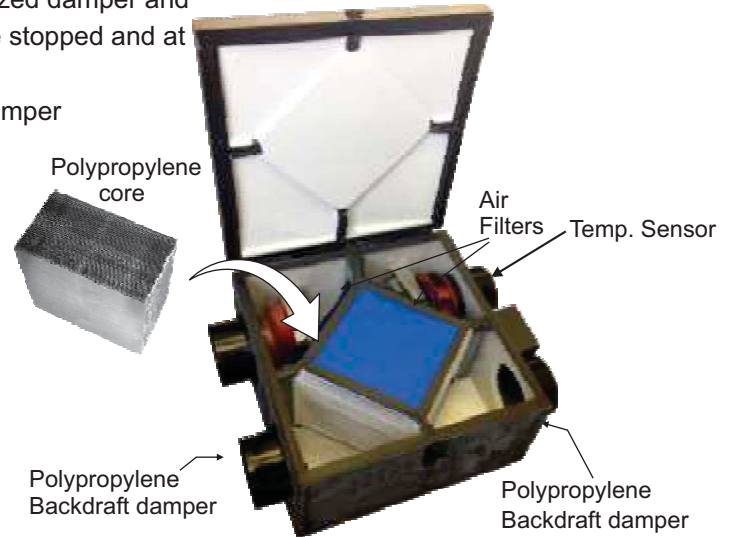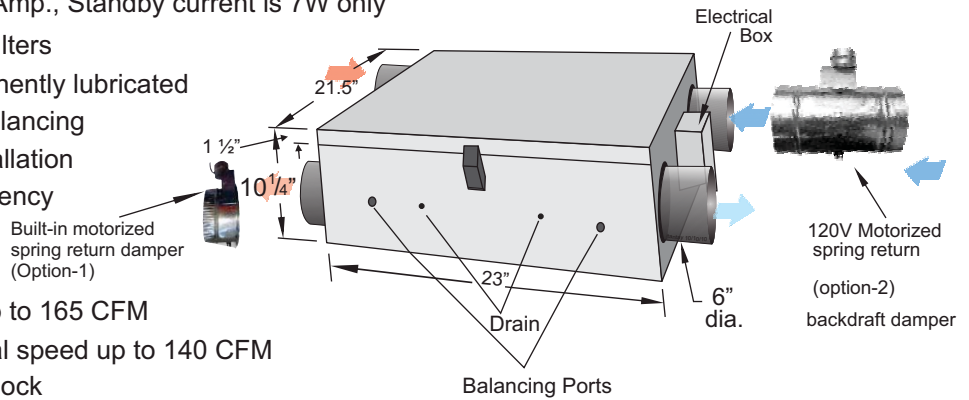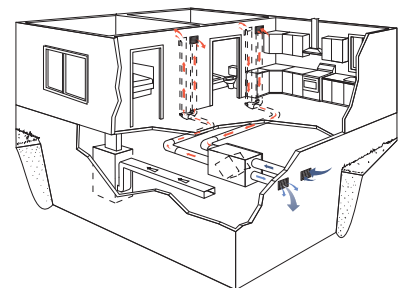

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com

Installation Options for High-Rise Condominium


Fully Ducted System

Motorized spring return backdraft damper (Recommended)



HRV with Fan Coil System

Motorized spring return backdraft damper (Highly Recommended due to chimney or stack effect)

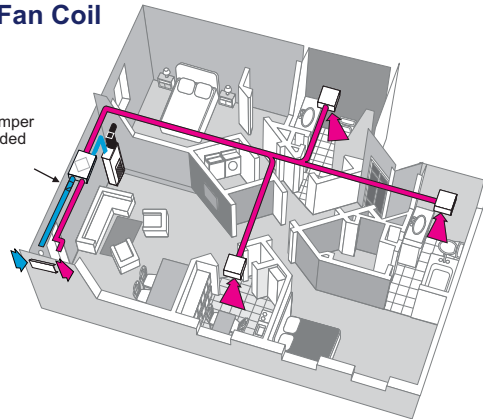

Note:

- HRV must be connected to drain.

VENTILATION PERFORMANCE

Model #	Normal Speed Supply/Exhaust (Constant Ventilation)	High Speed Exhaust (Activated by switch)	Maximum Power Rating 120V / 1 / 60Hz
RHRV-120PES	50 ~ 165 CFM variable	100 ~ 165 CFM variable	1.1 Amp.

SOUND:

30 (L/s) @ 0.2 (IN. W.G.)	1.7 sones (@ 50 Pa)
------------------------------	------------------------

* Normal and high speed can be adjusted by either installer or factory using speed controllers mounted on the main controller of the unit.

ENERGY PERFORMANCE

RHRV-120PES		Supply Temperature		Net Airflow		Supply / Exhaust Flow Ratio	Average Power (Watts)	Sensible Recovery Efficiency	Apparent Sensible Effectiveness	Net Moisture Transfer
		°C	°F	L/S	CFM					
Heating	i	0	32	23	49	1.03	42	73	82	0%
	ii	0	32	30	64	1.03	50	70	79	0%
	iii	0	32	40	85	1.01	60	66	73	0%
	iv									
	v	-25	-13	31	65	0.89*	32	61	79	1%
	vi	-25	-13	23	49	0.89*	42	63	86	1%

* Indicate the Supply/Exhaust flow ratio at 22°C prior to the start of the 72 Hour cold weather test

Contractor:		RHRV-120PES		
Architect:	Job:	Date	Superse.des	Drawing No.
Engineer:	Date Submitted:	2020/07/13		

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com