




ULTRA SUPER QUIET EXHAUST FAN

The CF-170E fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. The CF-170E is constructed with corrosion resistant, heavy gauge satin coat steel. This fan is suitable for installation over bath tub or shower stall with GFCI protected branch circuit.

CF-170E FAN DATA

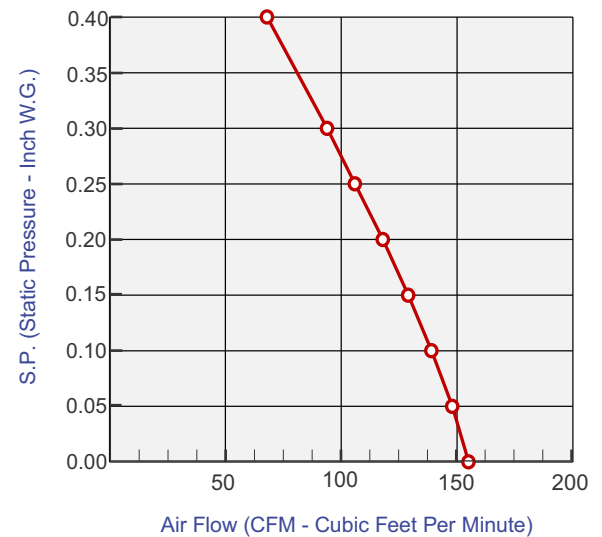

Plastic Backdraft Damper

White High Impact

Off White Aluminum Grille

ACCESSORIES


Standard:

- Insulated housing
- Metal collar with neoprene damper
- Mounting brackets
- Aluminum or styrene grille

Optional:

- Variable speed control
- Aluminum backdraft damper
- Plastic backdraft damper



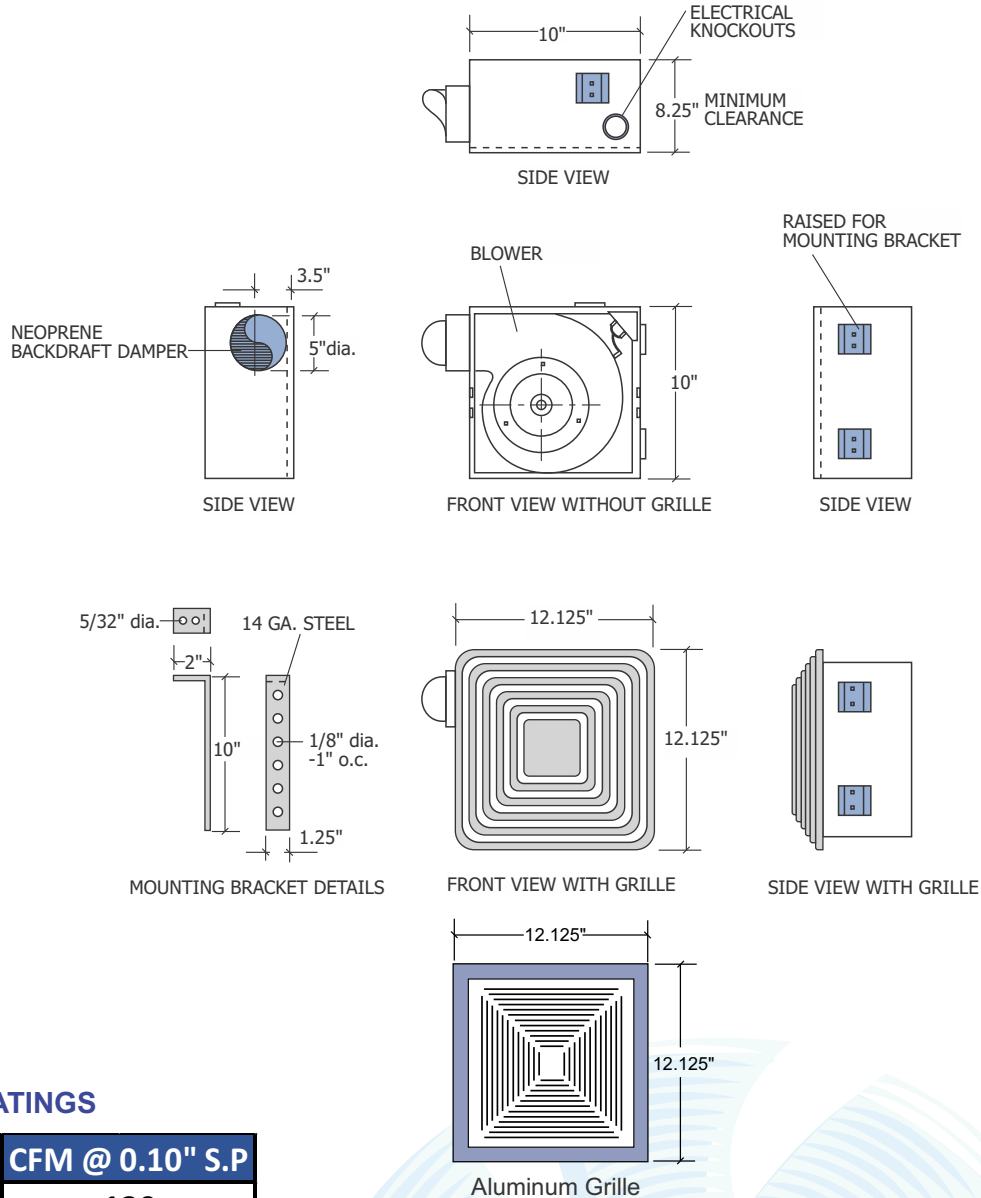

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P
CF-170E	2.0	130

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE									
	RPM	AMPS	WATTS	S.P	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40	0.50
CF-170E	1500	0.35	35	CFM	155	148	139	129	118	106	94	68	53

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct. All S.P. in inch W.G.

Contractor:		CF-170E		
Architect:	Job:	Date	Supersedes	Drawing No.
Engineer:	Date Submitted:	2020/07/16		