



SUPERIOR SERIES

Models:

SA-75E


- Attractive grille design using ABS material.
- Grille attaches directly to housing with torsion springs.
- Galvanized steel Housing.
- 4" diameter duct adapter.
- Built-in backdraft damper.
- Power rating of 120VAC/1/60Hz.
- Long-life PSC motor.
- Blower wheel design using PP material.
- UL, HVI and ENERGY STAR rated.
- Two years limited warranty.

HVI Certified Rating

SA-75E (70 CFM @ 0.10" S.P., 0.3 Sones)



FAN DATA

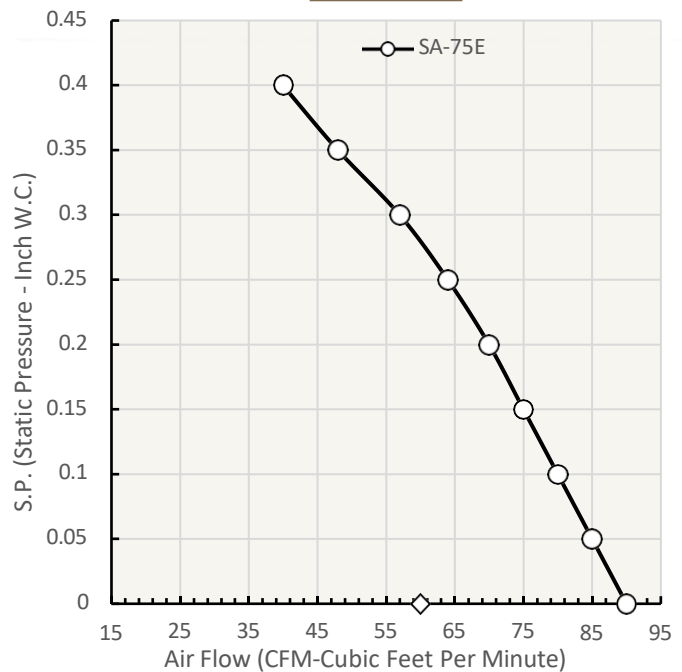

PERFORMANCE DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE									
	RPM	AMP	WATT	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40
SA-75E	875	0.16	16.7	CFM	90	85	79	75	70	64	57	48	40

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.