

LINT TRAP FOR STACKER DRYER

Model LT400SD



bottom view
of the lint trap

FEATURES:

- Simple and quick installation
- 38 sq. inch filtering area increases dryer efficiency
- Stainless steel filter screen for long life
- Available in 4" & 5" dia. sizes outlet
- Viewing Plexiglass
- Oven baked finish
- Easy to clean
- Positive lock



Sept. 2008

top view
of the lint trap



REVERSOMATIC
MANUFACTURING LIMITED


790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
Toll Free: 1.800.810.3473 (Canada) • 1.866.890.6457 (U.S.A.) • email: info@reversomatic.com
www.reversomatic.com

LINT TRAP FOR STACKER DRYER

Model LT400SD



INSTALLATION INSTRUCTIONS

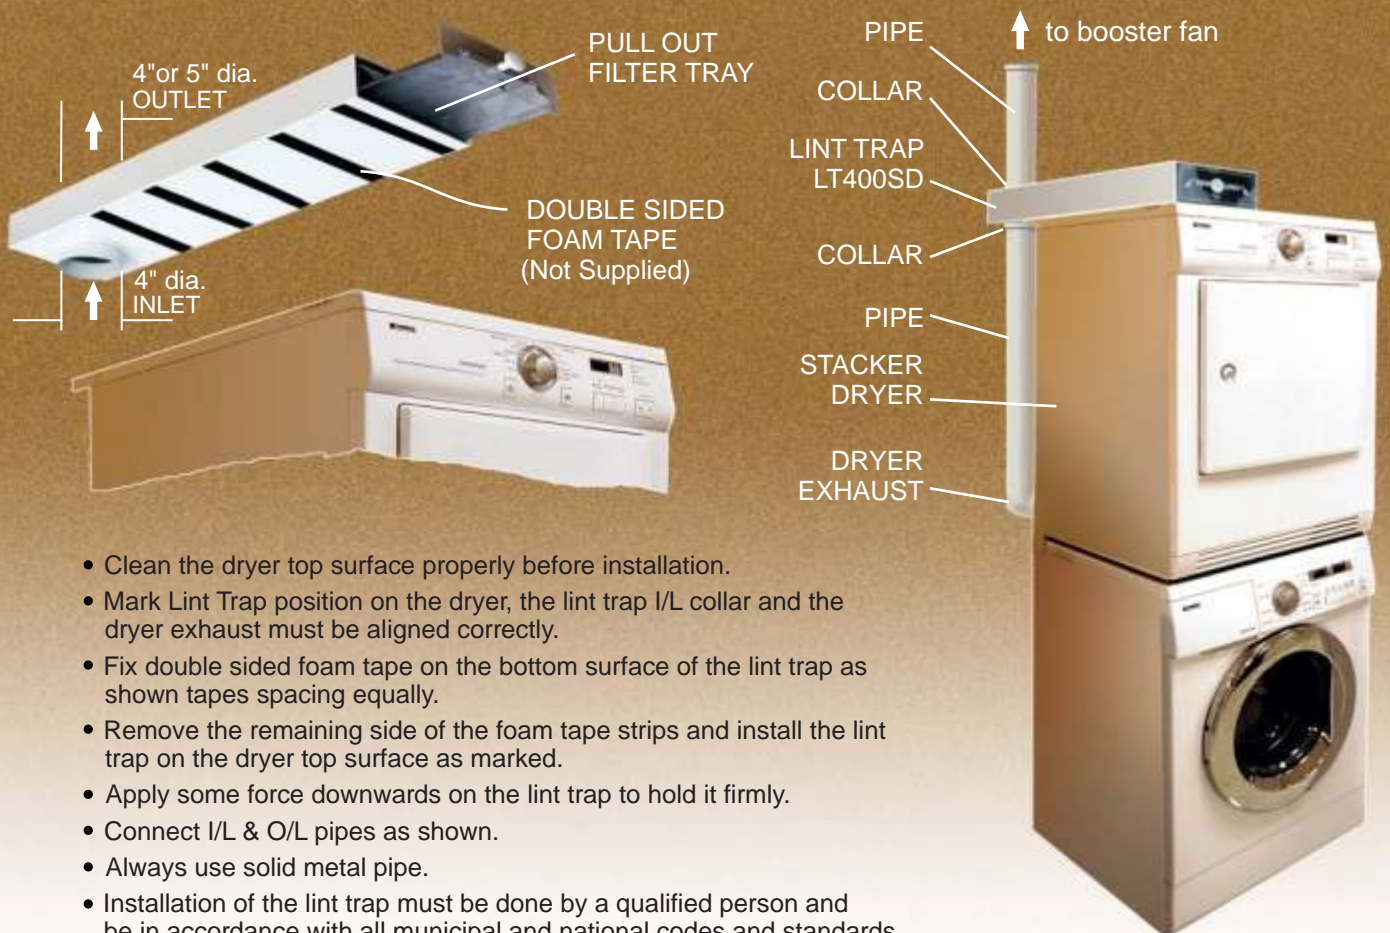

- Clean the dryer top surface properly before installation.
- Mark Lint Trap position on the dryer, the lint trap I/L collar and the dryer exhaust must be aligned correctly.
- Fix double sided foam tape on the bottom surface of the lint trap as shown tapes spacing equally.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect I/L & O/L pipes as shown.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE



REVERSOMATIC
MANUFACTURING LIMITED

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3
Tel: 905-851-6701 • Fax: 905-851-8376
Toll Free: 1.800.810.3473 (Canada) • 1.866.890.6457 (U.S.A.)
email: info@reversomatic.com • www.reversomatic.com