




GENERAL PURPOSE INLINE EXHAUST FANS


- Self cleaning, non overloading wheel.
- Engineered for quiet continuous operation making it perfect for general purpose ventilation and dryer exhaust application.
- Low profile construction simplifies installation in those tight spaces.
- Built with a well balanced motor impeller assembly, and a backward inclined wheel for smooth quiet operation.
- High efficiency motor.
- Hinged impeller for ease of cleaning and maintenance.
- Available with one, two and three inlets.
- Fan housing constructed of heavy gauge satin coat galvanized steel finish.
- The logical choice for use in high-rise condominium applications.
- Also meet Washington State Ventilation and Indoor Air Quality Code.

FAN DATA

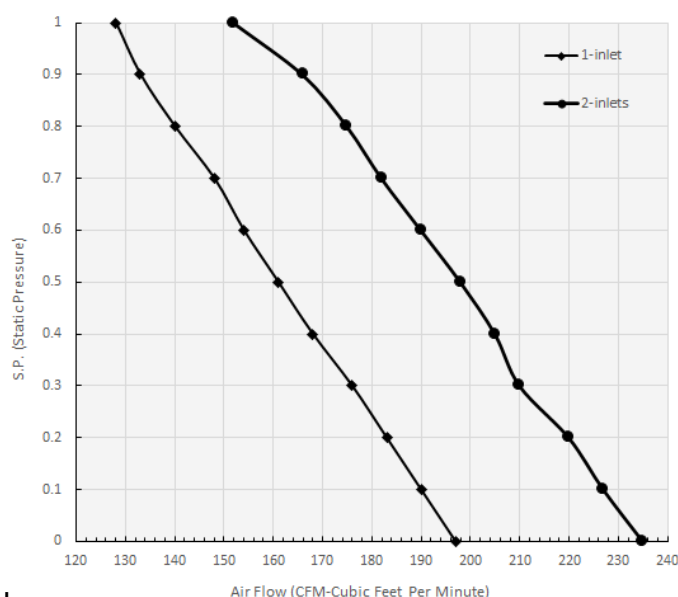

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com

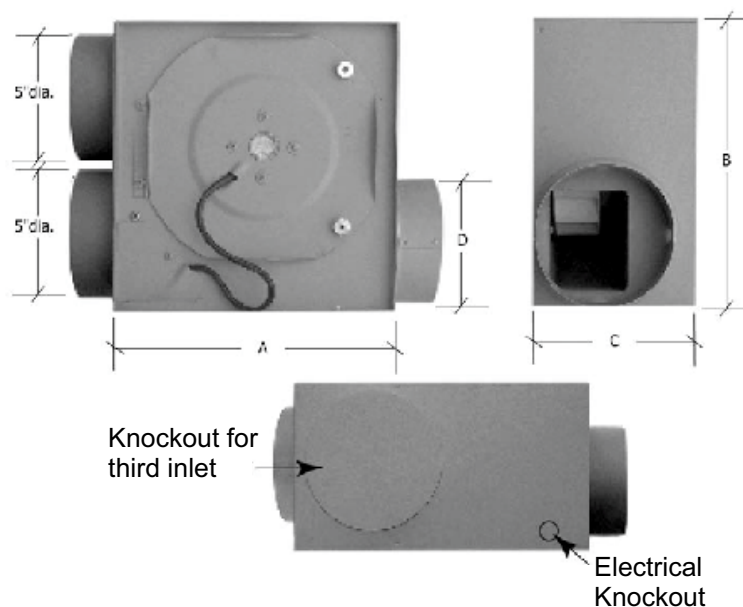

Also available in stainless steel construction for gas dryer.

DIMENSION DATA

MODEL	A	B	C	D
TLD 200	0.5	11	6	5

All dimensions are shown in inches.

HVI CERTIFIED RATING

MODEL	CFM @ 0.20" S.P.
TLD-200	180
2-inlet	220



FAN DATA

MODEL	MOTOR 120 VAC 60 Hz	CUBIC FEET PER MINUTE
	RPM AMPS	S.P. 0.00 0.10 0.20 0.30 0.40 0.50 0.60 0.70 0.80 0.90 1.00
TLD 200 (1 inlet)	2860 0.75	CFM 197 190 183 176 168 161 154 148 140 133 128
TLD 200 (2 inlets)	2880 0.80	CFM 235 227 220 210 205 198 190 182 175 166 152

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.

Contractor:		TLD-200		
Architect:	Job:	Data	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com