




**ULTRA SUPER QUIET EXHAUST FAN**

The QCF-125CO fan is designed for high performance and quiet operation. This fan is equipped with specially designed mounting slots that allow for easy installation on concrete ceilings or wooden joists. It is constructed with corrosion resistant, heavy gauge satin coat steel.

The QCF-125CO is available with 2 speed motor and 2 "ON" position switch for constant ventilation. One speed is always ON. It is suitable for installation over bath tub or shower stall with GFCI protected branch circuit. It also meets Washington State Ventilation and Indoor Air Quality Code.

**QCF-125CO FAN DATA**

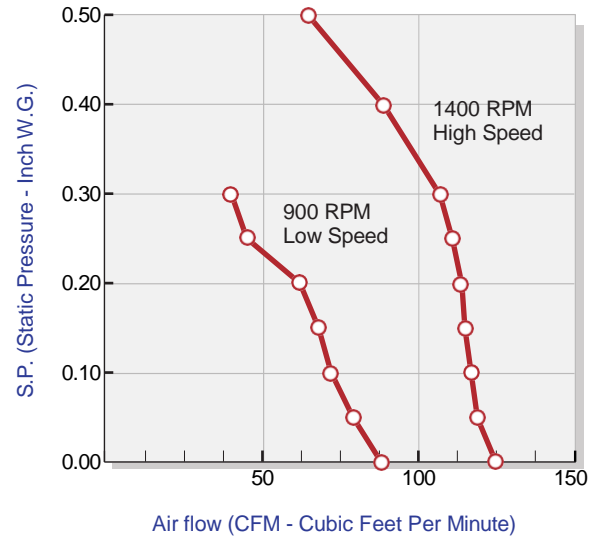

Hi-impact Polystyrene collar

High Impact Styrene Grille



Off White Aluminum Stamped Grille (Optional)



Off White Louvered Grille (Optional)

**ACCESSORIES**



*Standard:*

- Insulated Housing
- Mounting bracket
- Metal collar with neoprene damper
- High impact styrene grille

*Optional:*

- Hi-impact Polystyrene collar
- Variable speed control
- Aluminum backdraft damper
- Off white aluminum stamped or louvered grille
- 3 position toggle switch (on/off/on)



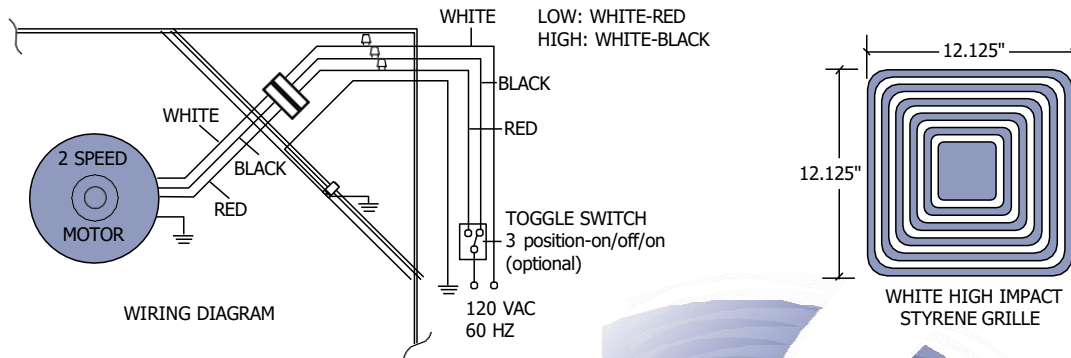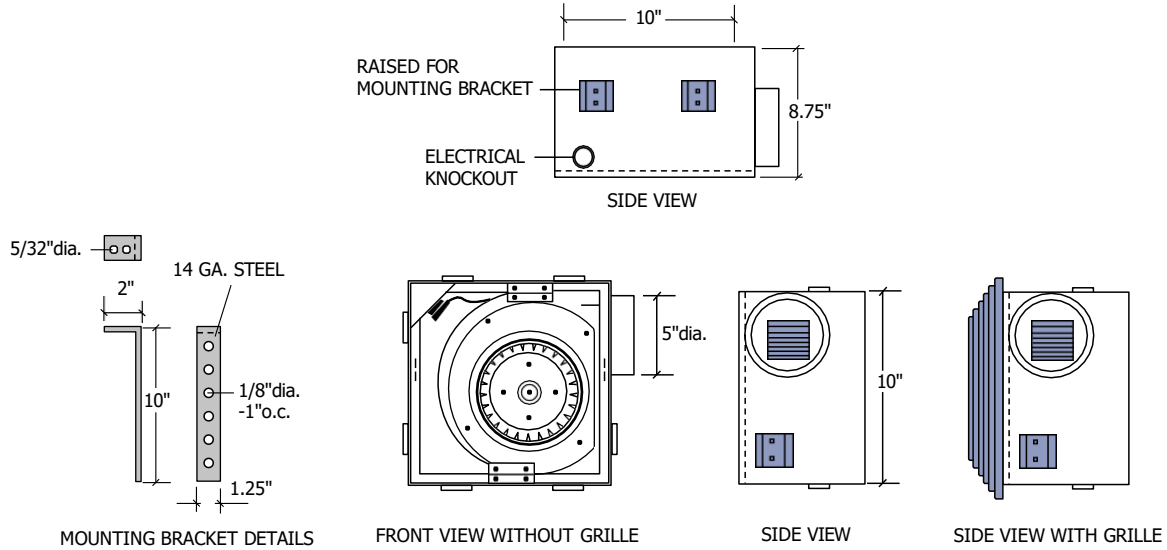

**HVI CERTIFIED RATINGS (High Speed only)**

MODEL	SONES	CFM @0.10" S.P.
QCF-125CO	2.0	110

**FAN DATA**

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE									SONES
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.40	0.50	
QCF-125CO	1400	0.6	CFM	126	120	118	116	115	112	108	90	66	2.0
	900	0.4	CFM	88	79	72	68	62	45	40			0.5

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:	QCF-125CO			
Architect:	Job:	Data	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

**Reversomatic Manufacturing Ltd.**

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376

[www.reversomatic.com](http://www.reversomatic.com) • [info@reversomatic.com](mailto:info@reversomatic.com)