




## BATHROOM EXHAUST FAN

The EB-100 fan has been specially designed for bathrooms in residential units which require low noise levels. It has been manufactured with a squirrel cage plastic impeller for high performance, slim housing allows for easy installation in those tight ceiling and wall spaces.




Hi-Impact  
Polystyrene  
Collar

High Impact  
Styrene Grille

Off White Aluminum  
Louvered Grille  
(Optional)

## EB-100 FAN DATA

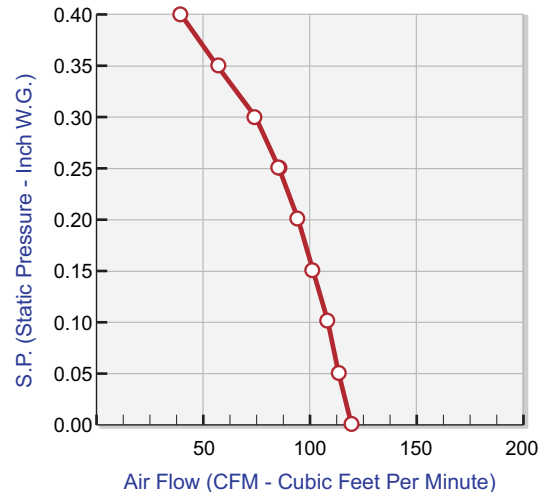

## ACCESSORIES


### *Standard:*

- Mounting bracket
- High impact styrene grille
- Metal collar with neoprene damper

### *Optional:*

- Hi-impact Polystyrene collar
- Variable speed control
- Aluminum backdraft damper
- Off white aluminum stamped or louvered grille



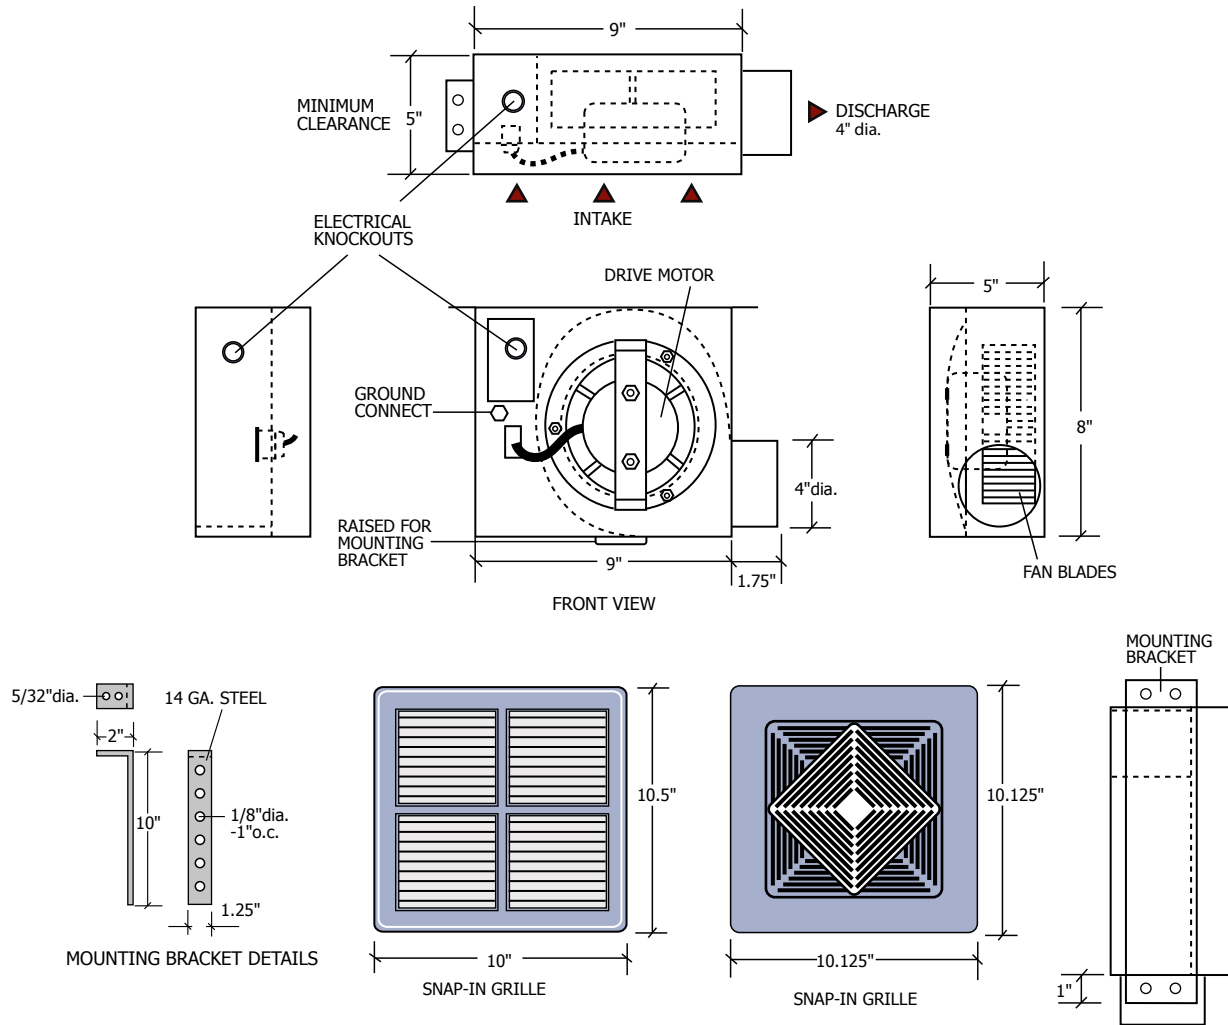

**HVI CERTIFIED RATINGS**

MODEL	SONES	CFM @ 0.10" S.P.
EB-100	3.0	100

**FAN DATA**

MODEL	MOTOR 120 VAC 60 Hz		CUBIC FEET PER MINUTE									
	RPM	AMPS	S.P.	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40
EB-100	1550	0.6	CFM	120	114	109	102	95	86	75	57	40

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test. Unit was tested with inlet grille, backdraft damper and outlet duct.

Contractor:	EB-100			
Architect:	Job:	Data	Supersedes	Drawing NO.
Engineer:	Date Submitted:			

**Reversomatic Manufacturing Ltd.**

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376  
 www.reversomatic.com • info@reversomatic.com