



SUPER QUIET BATHROOM FAN-LIGHT COMBINATION


Introducing our new super quiet low sones fan-light combination bathroom exhaust fan. The QB-80LT fan is specially designed for best performance at low noise level. This feature will undoubtedly give you the quietest fan-light in the market place.

Features:

- Attractive styling
- Aluminum/plastic grille
- Instant – ON, no flicker
- Save 75% - 81% energy
- Bulb – easy to replace
- Simplified mounting system
- Heavy gauge non corrosive satin coat construction
- Low heat generation extends life of lamp and reduces air conditioning cost
- Also meets Washington State Ventilation and Indoor Air Quality Code




Hi-Impact
Polystyrene
Collar



Optional Dome Light Grille

QB-80LT FAN DATA

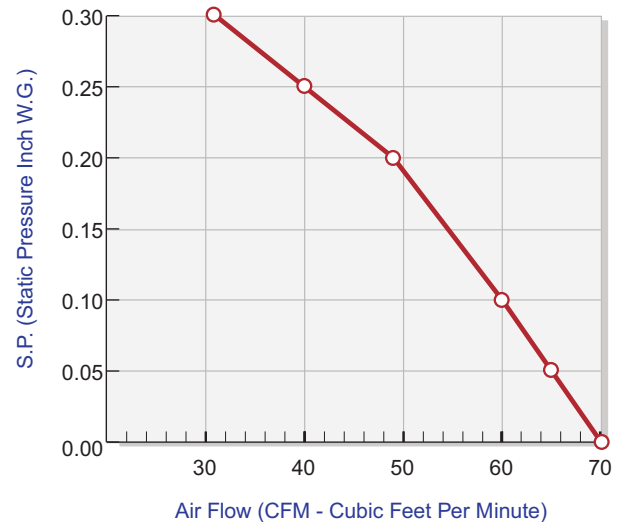

ACCESSORIES


Standard:

- Plastic snap-in light grille
- Metal collar with neoprene damper
- Mounting brackets

Optional:

- Variable speed control
- Dome light aluminum grille
- Aluminum backdraft damper
- Hi-Impact Polystyrene Collar




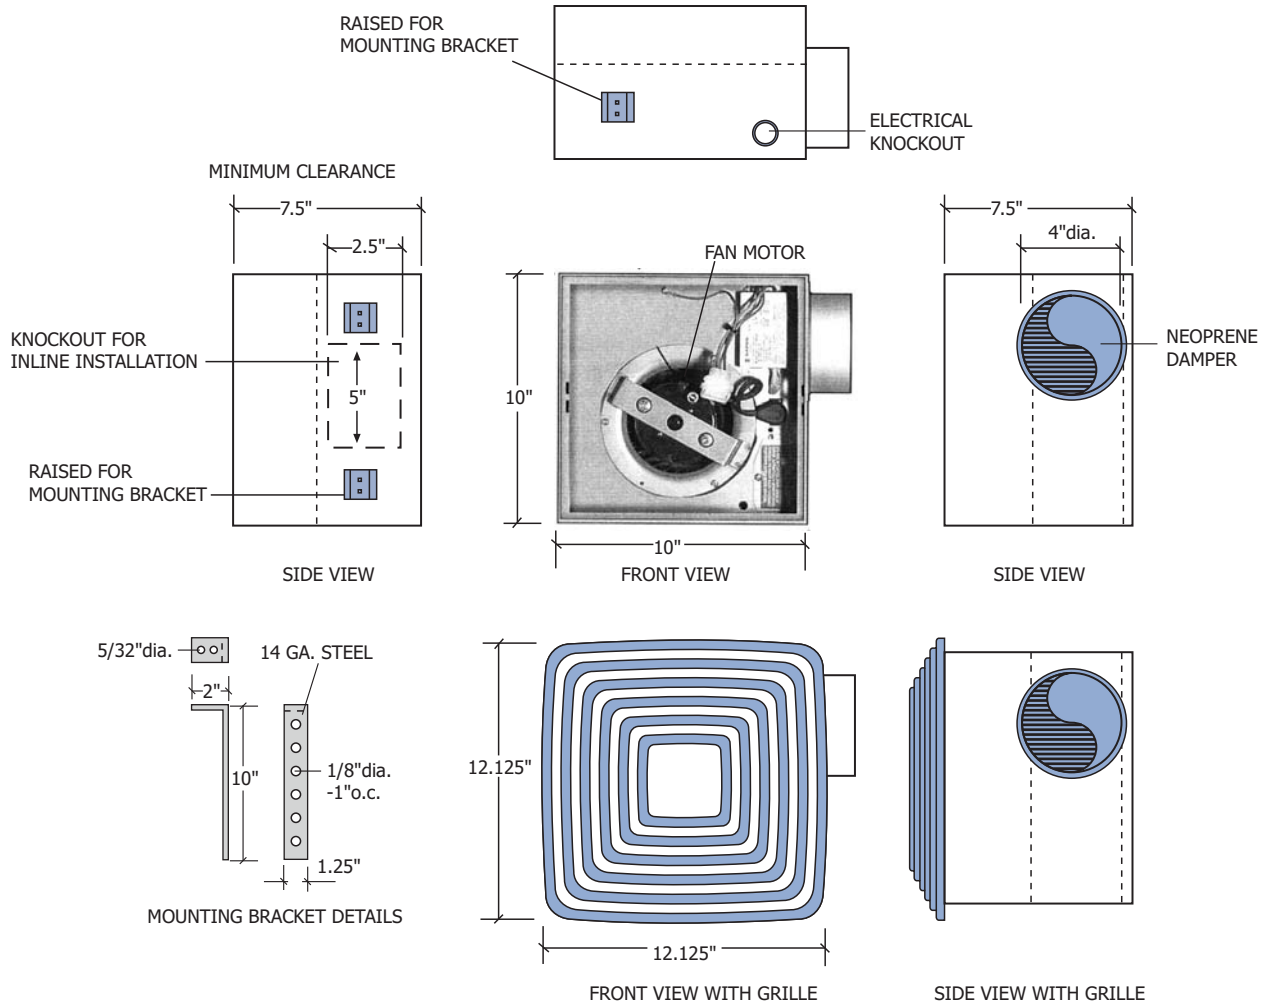

HVI CERTIFIED RATINGS

MODEL	SONES	CFM @ 0.10" S.P.
QB-80LT	0.6	60

FLUORESCENT LIGHT BULB - 4 PIN, 26 W (not supplied)



Bulb lasts up to 10,000 hrs.
Reduces maintenance cost.
Bulb contains mercury.
Dispose it according to local, state & Federal laws & regulations.

FAN DATA

MODEL	MOTOR 120 VAC 60 Hz			CUBIC FEET PER MINUTE						
	RPM	AMPS	WATTS	S.P	0.00	0.05	0.10	0.20	0.25	0.30
QB-80LT	1080	0.40	31.5	CFM	70	65	60	49	40	31

RPM (Revolution Per Minute) shown is nominal and performance is based on actual speed of test.
Unit was tested with inlet light grille, backdraft damper and outlet duct.

Contractor:	QB-80LT		
Architect:	Job:	Date	Supersedes
Engineer:	Date Submitted:		Drawing NO.

Reversomatic Manufacturing Ltd.

790 Rowntree Dairy Road, Woodbridge, ON Canada L4L 5V3 • Tel: 905-851-6701 • Fax: 905-851-8376
www.reversomatic.com • info@reversomatic.com